



WA2

- The Weld Analyser offers the engineering professional the facilities to analyse, fault-find and improve process quality on today's sophisticated welding control systems.
- Full traceability gives you the confidence in your processes that your customers demand.
- Includes a 150mm flexible toroid, batteries and carry case.
- Measures 2.00 to 60.00 kA, 9999 cycles AC, 199.9 seconds DC, number of pulses, average conduction angle and weld time.

WELD FORCE GAUGES

PART NO	PRESSURE Lbs	PRESSURE Kgs	PRESSURE N
Presstotest A	0-600	0-275	0-2750
Presstotest B	0-1000	0-450	0-4500
Presstotest C	0-2000	0-900	0-9000
Presstotest D	0-4000	0-1800	0-18000



CAP REMOVAL TOOLS

PART NO	DESCRIPTION
CRT1	Cam Type 10mm - 22mm
CRT8HD	Jaw Type 16mm - 20mm
CRT6HD	Jaw Type 10mm - 16mm




TAPERED REAMERS

PART NO	DESCRIPTION
1/2 Reamer	1/2" BS807 5 Degree Inc Reamer
5/8 Reamer	5/8" BS807 5 Degree Inc Reamer
3/4 Reamer	3/4" BS807 5 Degree Inc Reamer



TORQUE TESTING SOCKETS FOR SQUARE NUTS

SQUARE WELD NUT SIZE	A/F mm	DRIVE A/F mm
M4	7	1/2
M5	9	3/8
M6	10	3/8
M8	14	1/2
M10	17	1/2
M12 & 7/16	19	1/2

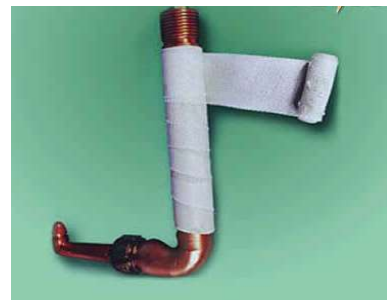

The **INSULATION BAND** is used where permanent insulation of the part is required.

Fibreglass band coated in epoxy resin guarantees a permanent insulation up to 11,000 volts and is heat resistant up to 300 Deg C.

50mm wide x 1500mm long



Jointing and Sealing Compounds

HERMATITE RED
Semi hardening gasket compound

COPPER GREASE
Conductive grease