



# MTI Welding Technologies, LTD.

Solid-State Joining & Welding Solutions, Equipment & Services

Including Specialty Resistance Welding Machines by



## STRONGHOLD SPOT WELDING MACHINE



Stronghold welding machines set the standard for multi-purpose resistance welding equipment, having adjustable reach for spot welding. They are easily adapted for projection welding and are available as a seam welding version.

Standard Features for spot welding include:-

- > **ADAPTABILITY** - Infinitely adjustable reach from 500-800mm.
- > **HIGH QUALITY WELDING** - Choice of 8 or 16 program microprocessor weld control.
- > **PRODUCTIVITY** - Welding speeds up to 250 spots per minute.
- > **RELIABILITY** - 50% duty cycle encapsulated transformer.
- > **VERSATILITY** - Simple adaption to projection welding.

### Optional extras

- > Retract/high lift and or 160mm air cylinder.
- > 100KVA , 150KVA single phase AC or 100KVA.
- > 3-phase DC Medium Frequency Transformer.
- > Low Force Approach System.
- > Closed circuit water cooled system.
- > Integration of automatic nut and bolt feed machines.

Stronghold spot welding machines are available as inverter controlled medium frequency machines and offer the following added benefits:-

- > Improved weld quality.
- > Reduced Power consumption costs.
- > Lower peak currents providing increased electrode life.
- > 3-phase even load distribution.
- > Ideal for welding coated materials and aluminium.
- > Weld times reduced through increased rate of heat input to work piece.
- > Reduced weld splash owing to lower peak currents.
- > Can be retrofitted to existing machines.

Building 80 Bay 1, 1st Avenue, Pensnett Estate, Kingswinford, Dudley, DY6 7FQ, England

Phone: +44 (0) 1384 277502

Fax: +44 (0) 1384 298969

[www.britishfederal.co.uk](http://www.britishfederal.co.uk)

[sales@britishfederal.co.uk](mailto:sales@britishfederal.co.uk)






# MTI Welding Technologies, LTD.

Solid-State Joining & Welding Solutions, Equipment & Services

Including Specialty Resistance Welding Machines by

**BRITISH  
FEDERAL**

## Stronghold Spot Welder with adjustable reach

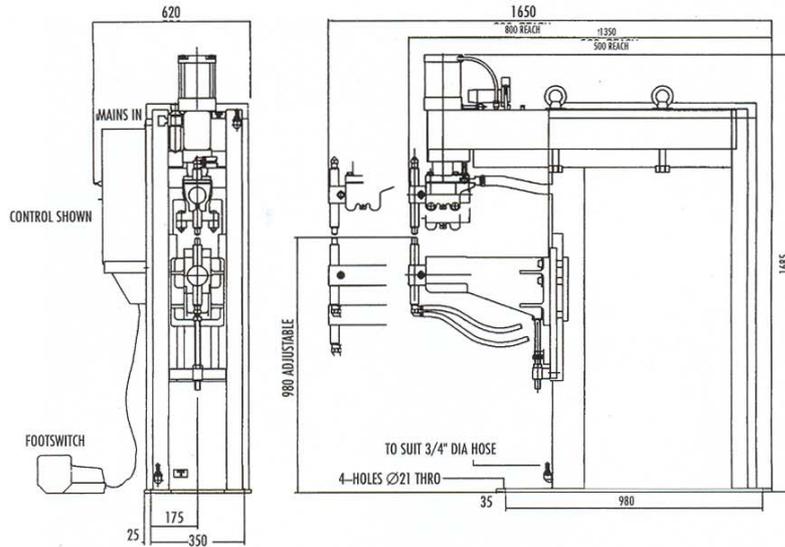

Drawing shows machine in standard mode

All measurements shown in mm unless otherwise indicated

Technical Specifications			75 Stronghold	100 Stronghold	150 Stronghold
Continuous power @ 100% duty cycle	S <sub>p</sub>	kVA	53	71	106
Max short circuit power	S <sub>sc</sub>	kVA	290	360	460
Max welding power	S <sub>max</sub>	kVA	230	290	360
Nominal power @ 50% duty cycle	S <sub>50</sub>	kVA	75	100	150
Nominal supply voltage	U <sub>in</sub>	V	380 / 440	380 / 440	380 / 440
Continuous primary current at 100% DC	I <sub>1p</sub>	A	130	170	250
Supply frequency		Hz	50	50	50
Supply phases			2	2	2
Supply capacity		kVA	170	210	300
HRC fuse size to BS88		A	160	200	315
Feed cable c.s.a up to 30m. long		mm <sup>2</sup>	50	70	95
Max. short circuit primary current	I <sub>1sc</sub>	A	690	860	1,200
Max short circuit secondary current	I <sub>2sc</sub>	A	32,000	35,000	42,000
Max welding current	I <sub>2max</sub>	A	25,000	28,000	33,000
Duty cycle for max welding	X <sub>max</sub>	%	5.4	6.1	7.1
Continuous secondary current at 100% DC	I <sub>2p</sub>	A	6,000	7,200	8,900
Number of taps			3	3	3
Secondary open circuit volts	U <sub>2o</sub>	V	8.8 / 8 / 7	9.9 / 8.8 / 8	11.9 / 10.4 / 8.6
Weld cylinder		mm	125	125	160
Weld force min/max with a 1.5/5.5 bar supply		kN	1.8 / 6.7	1.8 / 6.7	3.0 / 11.0
Weld force min/max with an 20/80 psi supply		lbf	400 / 1,500	400 / 1,500	650 / 2,500
Weld cylinder stroke max.		mm	76	76	76
Air pressure normal		bar	5.5	5.5	5.5
Air pressure max operating		bar	7	7	7
Air connection/hose size		BSP/in	1/2" / 1/2"	1/2" / 1/2"	1/2" / 1/2"
Cooling water min operating pressure		bar	3	3	3
Cooling water consumption		Lit./min	20	20	20
Cooling water max inlet temp.		°C/°F	30 / 86	30 / 86	30 / 86
Cooling water connection/hose size		BSP/in	1/2" / 3/4"	1/2" / 3/4"	1/2" / 3/4"
Shipping specifications	machine size	mm	590W x 1,350D x 1,685H	590W x 1,350D x 1,685H	590W x 1,350D x 1,685H
	machine weight.	kg	595	595	655

MTI Welding Technologies, Limited reserves the right to change specifications and appearance without prior notice.

Building 80 Bay 1, 1st Avenue, Pensnett Estate, Kingswinford, Dudley, DY6 7FQ, England

Phone: +44 (0) 1384 277502

Fax: +44 (0) 1384 298969

www.britishfederal.co.uk

sales@britishfederal.co.uk

